



**MPT PACKAGING LTD**  
SPECIALISTS IN PACKAGING  
MACHINERY & FILMS  
UK & IRE

# REPLAY 40 EVO

TROLLEY MANUAL HEAT-SHRINK - SEALING BAR 420X280 MM



## DESCRIPTION

The Replay EVO range includes a series of basic chamber wrapping machines, while not sacrificing the typical quality of the products by Minipack®-Torre. Thanks to the excellent value for money, offering new cutting-edge systems at affordable prices, it is the most competitive proposition among all our series of chamber machines



**MPT PACKAGING LTD**

SPECIALISTS IN PACKAGING  
MACHINERY & FILMS  
UK & IRE



Replay 40 EVO combines a high technological content with important qualities such as compact and essential shapes, pairing efficacy with excellence as all the Minipack®-Torre packaging machines.

## TECHNICAL FEATURES

Electrical power supply	200V 1Ph 230V 1Ph
Maximum power installed	3,35 kW (200V) 3,45 kW (230V)
Maximum current	14,5 A (200V) 15 A (230V)
Hourly output	0-300
Available dimensions of the sealing bars	420x280 mm
MAX Reel Dimensions (Ø x length)	Ø 250x500 mm
MAX product size	400x250x160 mm
Work Surface Height	925 mm
Machine dimensions (open hood)	1160x700x1220 mm
Machine dimensions (closed hood)	1160x700x1120 mm
Weight (Net/Gross)	90/111 kg


minipack®-torre shall not be held liable for typos or printing errors in this catalogue. It also reserves the right to make changes to the specified features without prior notice. All trademarks are property of their respective owners and are hereby acknowledged.



**MPT PACKAGING LTD**

SPECIALISTS IN PACKAGING  
MACHINERY & FILMS  
UK & IRE

## TECHNICAL DRAWING

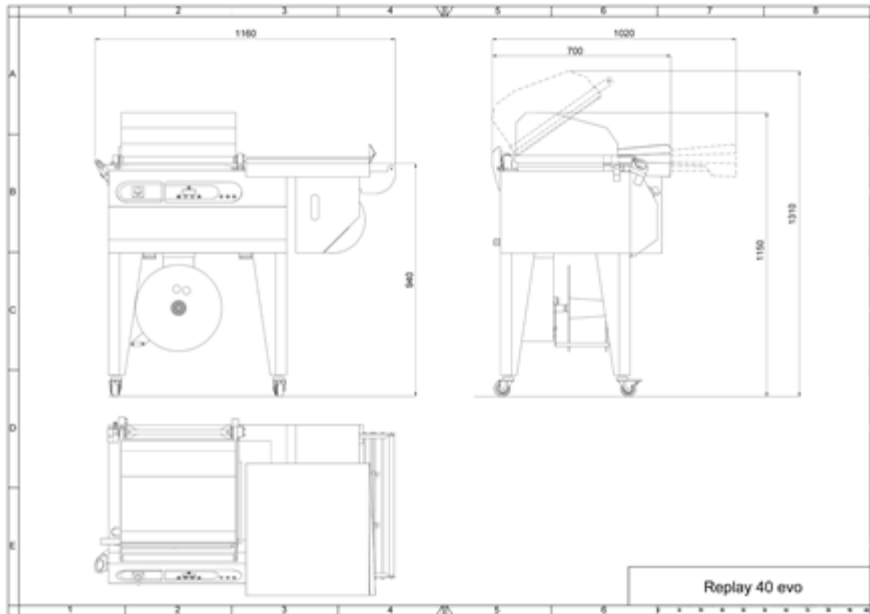



**MPT PACKAGING LTD**  
SPECIALISTS IN PACKAGING  
MACHINERY & FILMS  
UK & IRE

## TECHNICAL SOLUTIONS

---

**High-performance steel resistors:** shrinking time cut by 50% and heating time cut by 60%

**Soft Shrink fan speed adjustment:** perfect heat-shrinking also on very light or flexible products.

Sealed areas do not open. Extremely quiet. Exclusive patent

**Comfort Zone Fan Stop:** the fan stop is a “green” solution that allows to save 20% more energy and provides greater operator comfort during packaging, since the fan stops when the chamber opens

**New latest-generation board:** quality components. 4-digit display.

o