



MPT PACKAGING LTD
SPECIALISTS IN PACKAGING
MACHINERY & FILMS
UK & IRE

REPLAY 55 C EVO-A

**AUTOMATIC HEAT SHRINK MACHINE - SEALING BAR 540X390 MM - DEDICATED
ELECTRONIC CARD - DOUBLE DISPLAY**



DESCRIPTION

The historic REPLAY 55 C is renewed by combining reliability and ease of use. With a dedicated electronic interface card and an electro-mechanical panel we guarantee reliability, safety, speed and availability of spare parts.

PTPACKAGING LTD Record Packaging Systems

Unit 41, Stretford Motorway Estate, Manchester, UK, M32 0ZH Unit 69, Premier
Business Park, Ballycoolin Road, Dublin, IRE, D11 EP11 Tel.: +44 161 864 3971 -
Recordpackaging.com



TECHNICAL FEATURES


Electrical power supply	200V 50/60Hz 3Ph 400V 50/60Hz 3Ph 230V 50/60Hz 1Ph
Maximum power installed	4,0 kW (200V) 4,1 kW (400V 50Hz) 4,4 kW (400V 60Hz) 3,4 kW (230V 1Ph)
Maximum current	18 A (200V) 10,5 A (400V 50Hz) 11 A (400V 60Hz) 15 A (230V 1Ph)
Hourly production	0-550
Useful dimensions of sealing bars	540x390 mm
Maximum reel dimensions (Ø x length)	Ø250x600 mm
Maximum product dimensions	500x380x200 mm
Work surface height	925 mm
Machine dimensions (open hood)	1260x810x1310 mm
Machine dimensions (closed hood)	1260x810x1165 mm
Machine weight (net / gross)	133/154 kg
Machine color	RAL7035 peeled
Packaging flat color	RAL7016 peeled

Record Packaging shall not be held liable for typos or printing errors in this catalogue. It also reserves the right to make changes to the specified features without prior notice. All trademarks are property of their respective owners and are hereby acknowledged.



MPT PACKAGING LTD
SPECIALISTS IN PACKAGING
MACHINERY & FILMS
UK & IRE

TECHNICAL DRAWING

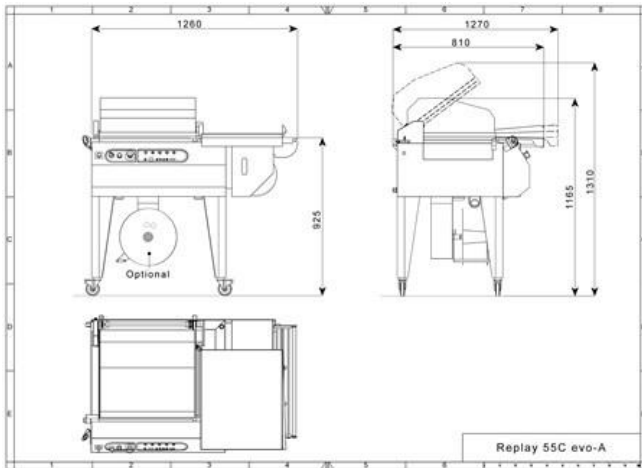

TECHNICAL FEATURES:

Option of having an 'Automatic' work cycle (press the start button cycles performed in sequence, interrupted by the programmed pause interval) and a 'Manual' work cycle (press the start button to perform one packaging cycle)

Automatic lid opening

Frontal control interface: intuitive programming

Innovative upper hood fixing, easier maintenance

Safety control on sealing blades: safer machine

Roll support with bigger diameter (250 mm)

Packaging plate independent from roll support: suitable for the packaging of small products with the same film roll

Innovative micro puncher: continuous and accurate perforation

Double display: 2 digit for programs and settings and 4 digit as pieces counter

6 programs digital control panel easy to be used

Counter pieces included: more complete equipment

Power board access with frontal door

Higher screened plate: more protection of the heating elements

More powerful fan motor: superior shrinking performance

Extra safety thermostat on the heating elements: safer machine

New rubber support without glue

o

PTPACKAGING LTD Record Packaging Systems

Unit 41, Stretford Motorway Estate, Manchester, UK, M32 0ZH Unit 69, Premier
Business Park, Ballycoolin Road, Dublin, IRE, D11 EP11 Tel.: +44 161 864 3971 -
Recordpackaging.com