



MPT PACKAGING LTD
SPECIALISTS IN PACKAGING
MACHINERY & FILMS
UK & IRE

FM77 EVO

TROLLEY MANUAL HEAT-SHRINK - SEALING BAR 840X590 MM



DESCRIPTION

It is precisely thanks to the innovative idea of **chamber wrapping machines** that, over thirty years ago, **Minipack®-Torre** was born. The first **chamber machine** was patented in 1976.

But ideas cannot be stopped. Today the company, after years of research and development, launches a new series that embodies all the qualities of the compact machines signed by Minipack®-Torre: simplicity of use, high strength and reliability.

MPTPACKAGING LTD Record Packaging Systems
Unit 41, Stretford Motorway Estate, Manchester, UK, M32 0ZH Unit 69, Premier
Business Park, Ballycoolin Road, Dublin, IRE, D11 EP11 Tel.: +44 161 864 3971 -
Recordpackaging.com



The **FM range** includes a series of **chamber wrapping machines** with an innovative and durable structure, the latest generation of electronic components and a long list of technical devices that further optimise the performance of these machinery.

Minipack®-Torre ideas always stand out.

TECHNICAL FEATURES


Electrical power supply	400V 50/60Hz 3Ph
MAX power installed	6,0 kW
Maximum current	9,5 A
Hourly output	0-300
Available dimensions of the sealing bars	840x590 mm
MAX product size	800x500x200 mm
Maximum reel dimensions (Ø x length)	Ø300x800 mm
Work surface height	940 mm
Machine dimensions (open hood)	1950x1000x1480 mm
Machine dimensions (closed hood)	1950x1000x1180 mm
Machine weight (Net/Gross)	220/272 kg

minipack®-torre shall not be held liable for typos or printing errors in this catalogue. It also reserves the right to make changes to the specified features without prior notice. All trademarks are property of their respective owners and are hereby acknowledged.



MPT PACKAGING LTD
SPECIALISTS IN PACKAGING
MACHINERY & FILMS
UK & IRE

TECHNICAL DRAWING

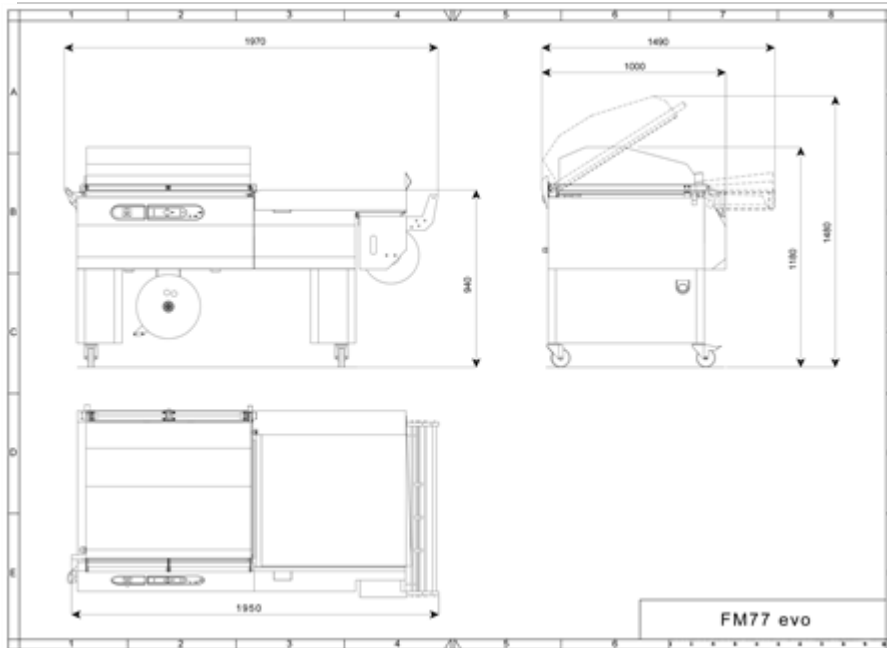

MPTPACKAGING LTD Record Packaging Systems

Unit 41, Stretford Motorway Estate, Manchester, UK, M32 0ZH Unit 69, Premier
Business Park, Ballycoolin Road, Dublin, IRE, D11 EP11 Tel.: +44 161 864 3971 -
Recordpackaging.com



TECHNICAL FEATURES

Standard sealing bar cooling: optimal sealing

Immediate shrink fan stop: reduced loss of hot air and resulting energy savings, a benefit for the operator

Innovative upper hood fastening: simplified maintenance and enhanced stability

Sealing blades safety control: enhanced machine safety

Support with larger reel diameter (300 mm): suitable for micro-punched film to pack bread

Packaging plate separated from the reel support: suitable to package even very small products with the same film reel

Innovative micro-perforator: continuous and optimal perforation

New ultra-flat tactile membrane: waterproof and with intuitive graphics not associated with the board

3-digit display: visibility and comprehensive information

Board with 10 programs to meet any programming need

Piece counter included: a more exhaustive supply of equipment

Board access through a door: easier maintenance from the front

Longer screened plate: chamber opening flap protection

Boosted fan motor: superior shrinking performance

Added safety thermostat installed directly on the resistor of the heat chamber: greater safety for the machine

Glue-less neoprene rubber support: easy to replace, does not require the use of glue.